

PART # 13-093

50 AMP DC Converter

(72-12 Volts)

INSTALLATION INSTRUCTIONS

RELIANCE™



INCLUDED:

- Δ Converter
- Δ Flying Lead Harness


TOOLS NEEDED:

- Δ Wire Stripper/Cutters
- Components
- Δ Cordless Drill

DC CONVERTER



Reliance recommends professional installation. If you choose not to have this product installed by a professional, we highly recommend that you exercise caution, care, and patience when installing this product.

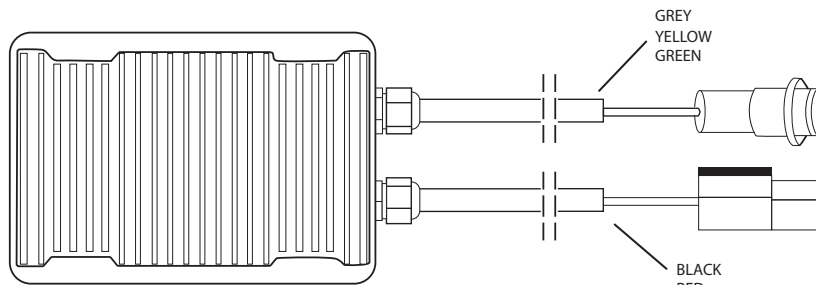

- Δ **YELLOW:** 72V Input (+) From Battery
- Δ **GREEN:** 72V Switched Input (+) From Key Switch
- Δ **BLACK:** 12V Output (-)
- Δ **RED:** 12V Switched Output (+) Turns ON Via Key Switch
- Δ **GREY:** Input 48V (-) From Battery

NOTE: If installing this product on an E-Z-GO RXV please see special instructions on next page.

IMPORTANT

In order to ensure proper function of your Reliance DC to DC converter, you must first determine your main positive and negative battery terminals. Wires (3 yellow) and (2 Grey) **MUST** be connected across your entire battery pack and wire (4 green) **MUST** be connected to your key switch. During normal operation, the Reliance DC to DC converter will generate a significant amount of heat. The unit should be mounted to a metal frame member in order to prevent possible damage to your cart.

If you do not use either wire (1 red) or wire (5 Black) you **MUST cap the wire with a wire nut or a crimp cap.**

****For E-Z-GO RXV – Instead of connecting the Green (4) wire to your key switch, connect it to the switched large terminal of your solenoid. Use a multimeter to determine which terminal is switched****

WIRE DESCRIPTIONS:

- 1 RED** – Accessories feed to this 12V switched wire. When green wire is attached to key switch power source, this wire will provide power to the accessories.
- 2 GREY** – Connect to the main ground (-) on battery pack.
- 3 YELLOW** – Connect wire to main positive (+) on battery pack.
- 4 GREEN** – Connects to switched 72V power source. (Key Switch is 72V when on or when off) Attach green to contact that shows volts only when key is turned to the ON position. This wire turns OFF and ON converter.
- 5 BLACK** – 12V (-) output, negative end on 12V accessories connect to this wire.

To connect your accessory, you will connect the positive wire from your accessory to the red wire coming from the converter. You will connect the negative wire to the black wire coming from the converter. When connecting the converter to power, it is normal to see a spark. This is the converter powering up.

NOTE: To prevent damage, avoid mounting the DC/DC converter on plastic surfaces, as heat may affect the plastic.

INSTALLATION COMPLETE