

Radio Console Installation Instructions for E-Z-GO Medalist/TXT

Note: always wear appropriate eye protection!

Console Preparation:

Remove console top cover by removing five screws (figure a). Using speaker manufacturer supplied template, carefully cut speaker openings. Cut out radio opening above storage compartment (figure b). Install radio and speakers and complete all necessary wiring according to manufacturers instructions.

If necessary cut access holes in top cover for antenna and power wiring. Route wires through holes and replace console top cover.

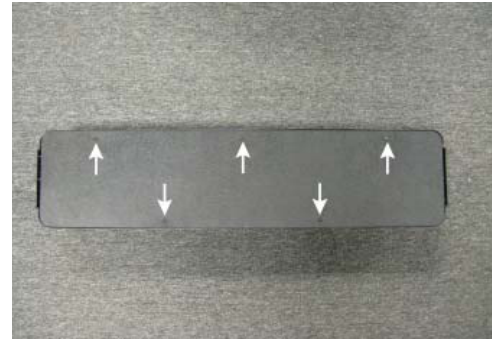


figure a



Install brackets in console as shown in figure c. Use eight self-tapping screws provided. An extra hole must be marked and drilled into the console for the angle brackets.

Console Installation:

Remove the nuts from the bolts that secure the roof to the front roof struts. The front of the console assembly will mount to these bolts (figure d). Reinstall and tighten nuts. Mark and drill 1/8" pilot holes for angle bracket and secure with hardware provided. Complete all wiring according to cart owners manual and/or manufacturers instructions.



figure b



figure c



figure d