

**03-226: One Piece Automotive Style Grab Handle**


**STEP 1**

Insert allen head bolt into the grab handle and thread on the 'T' nut onto the end of the bolt.



**STEP 2**

Align the 'T' nuts with the inside wide track as shown.

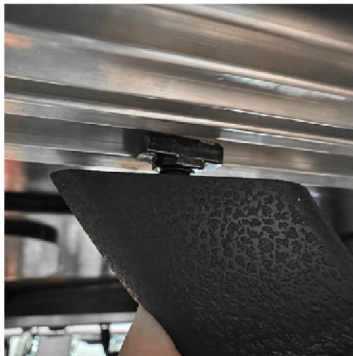

**STEP 3**

Using a 6mm allen wrench, tighten the allen head bolt ensuring the 'T' nut engages on the triple track top.



**STEP 4**

Tighten the allen head hand tight to ensure the grab handle is secure to the top and use supplied plugs to cover bolt holes.



**03-167: Round Grab Handle with Nylon Strap**

**STEP 1**

Install the 'T' studs into the inside wide track and turn to engage with track.



**STEP 2**

Place grab handle mounting bracket onto the 'T' studs with the flat side facing out, as shown in Step 3.

**STEP 3**

Thread the supplied locknut onto the 'T' studs as shown and adjust the grab handle to desired width.



**STEP 4**

Using a 13mm socket, hand-tighten down the locknut securely, ensuring the 'T' stud is fully engaged with the track.



*Note: Self-tapping screws included for optional installation locations.*